



TACT SWITCH

P/N:

TSE34331-019F831KA-R3000



Professional Manufacturer Since 2000

SPECIFICATIONS

Funtion: Momentary action
Contact Arrangement: SPST, Normally Open
Termination: SMD version

Mechanical

Actuation Force: 260±50grams
Life Expectancy: 1,000,000 Operations

Electrical

Contact Rating: 50mA @ 12V DC
Dielectric Strength: 250V AC/50Hz for 1minute
Contact Resistance: 100mΩ Max.
Insulation Resistance: 100MΩ Min.
Travel: 0.15^{+0.2}_{-0.05}mm

Environmental




Operating Temperature: -25~+70℃
Relative Humidity: (40℃) ≤95%

Materials



5.Stem: Black Rubber
4.Cover: Stainless steel
3.Spring: Stainless Steel with Silver Cladding
2.Holder: Black PA6T
1.Terminal: Copper with Silver Cladding

Packaging

Bulk Package
Inner Package: Reel
Outter Package: Carton

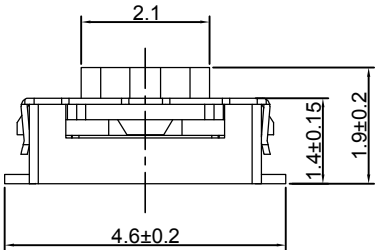

CIRCUIT DIAGRAM

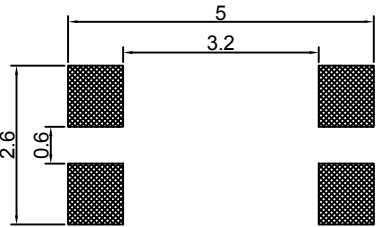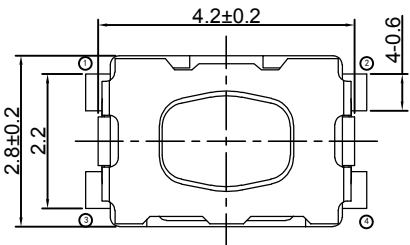


P.C.B. LAYOUT

KHON® WENZHOU KHAN ELECTRONIC

VERSION

KH14FE22E

PROJECTION



Dimnensions are shown:mm(inches)

2025.05.04

DESIGNED

JiaCheng Yu

CHECKED

ShuQing Zhu

APPROVED

Johan Xu