



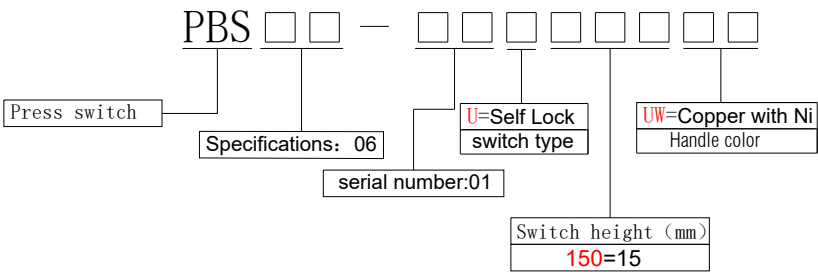

Switch drawings

Number Description

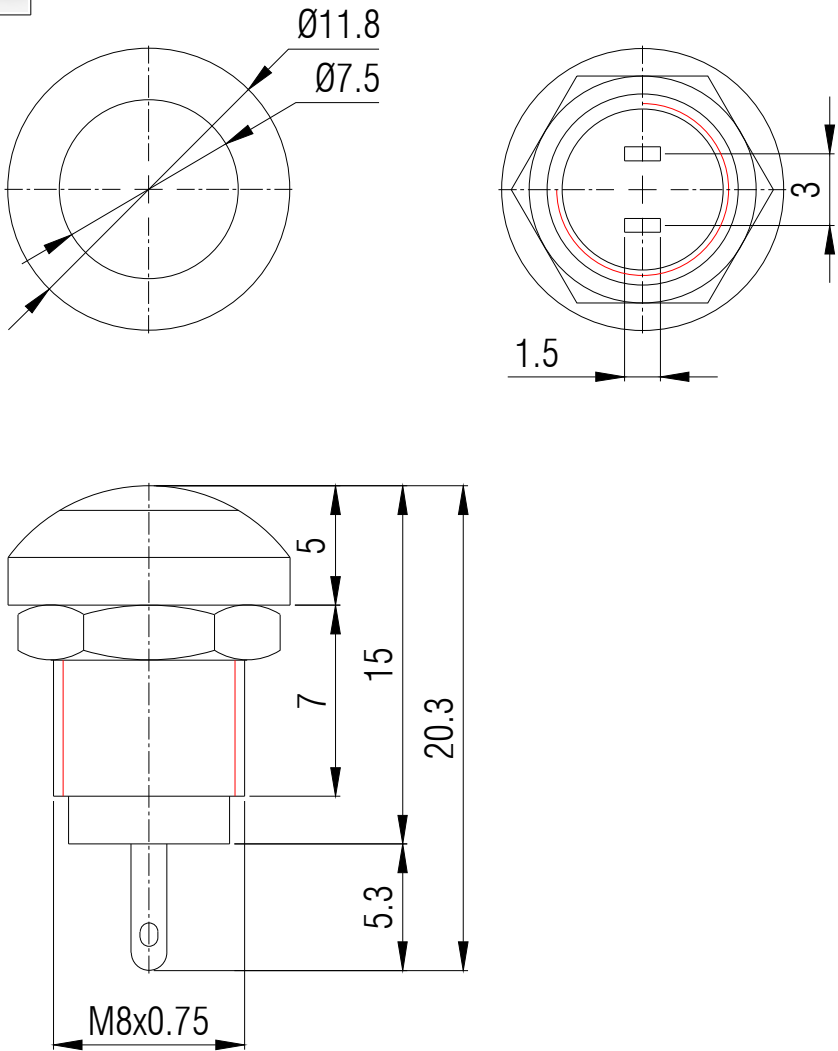

SPECIFICATIONS

Funtion:	ON-OFF
Contact Arrangement:	1P1T, Normally Open
Termination:	THD version

Environmental

Operating Temperature:	-25~+70℃
Relative Humidity:	(40℃) ≤95%

Electrical

Contact Rating:	0.3A 36V DC
Dielectric Strength:	250VAC /1min
Contact Resistance:	100mΩ Max.
Insulation Resistance:	100MΩ Min.
Travel:	1.5~2mm
Sealing:	/

Mechanical

Actuation Force:	250±100gf
Life Expectancy:	5000

Note: Unmarked tolerances for linear dimensions shall be in accordance with GB/T1804 level m.