
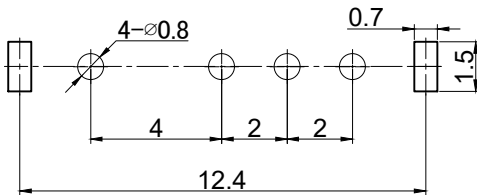
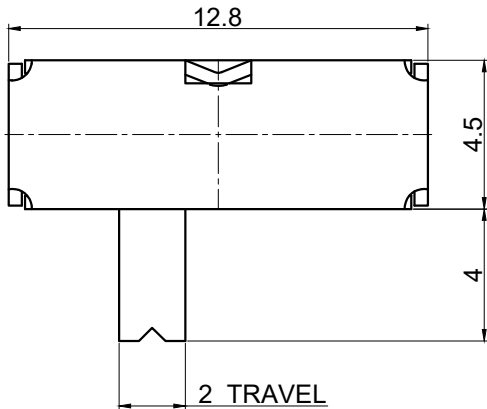
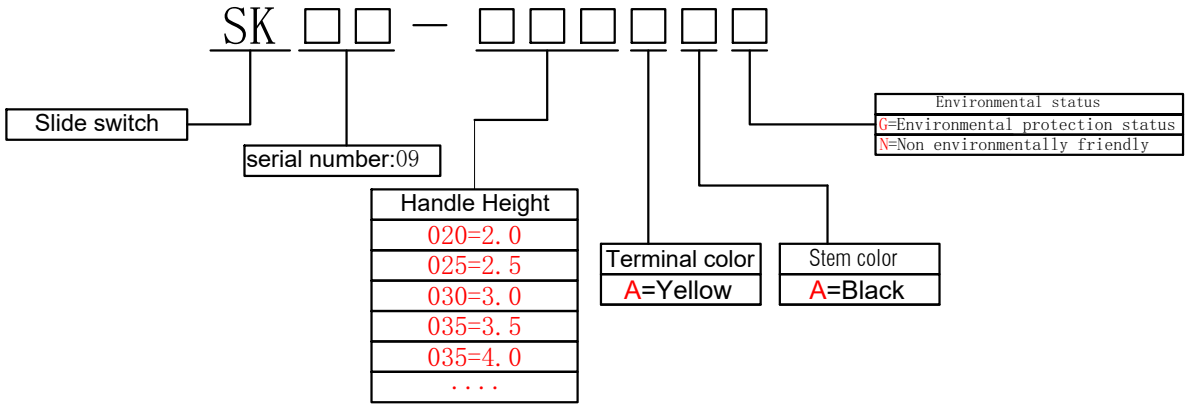
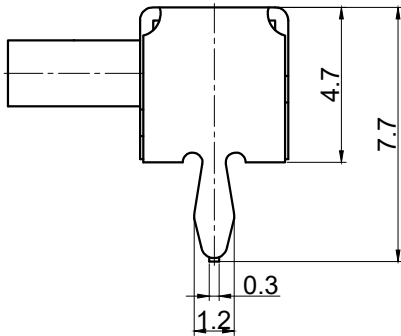



Switch drawings

Number Description

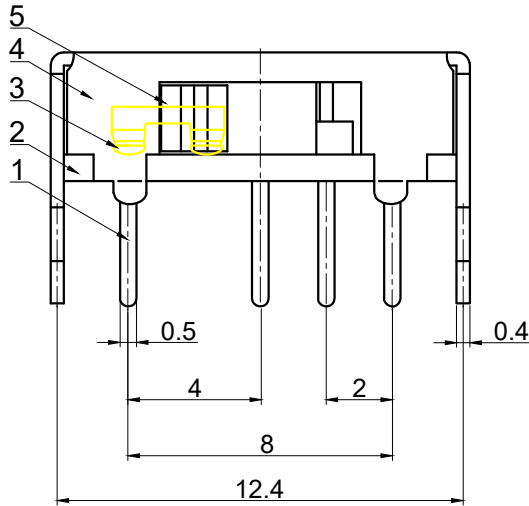

P.C.B. LAYOUT

Note: Unmarked tolerances for linear dimensions shall be in accordance with GB/T1804 level m.

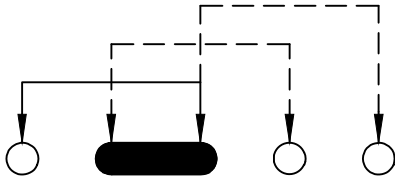

CIRCUIT DIAGRAM

SPECIFICATIONS	
Funtion:	ON-OFF
Contact Arrangement:	1P3T, Normally Open
Termination:	THD version
Environmental	
Operating Temperature:	-25~+70℃
Relative Humidity:	(40℃) ≤95%
Electrical	
Contact Rating:	0.3A 50V DC
Dielectric Strength:	250VAC /1min
Contact Resistance:	100m Ω Max.
Insulation Resistance:	100M Ω Min.
Travel:	2±0.2mm
Sealing:	/
Mechanical	
Actuation Force:	250±100gf
Life Expectancy:	5000

Materials	
5.Cover:	Stainless Steel
4.Stem:	Black POM
3.Contact:	Phosphor copper plated with silver
2.Holder:	Diallyl Phthalate
1.Terminal:	brass plated with silver