



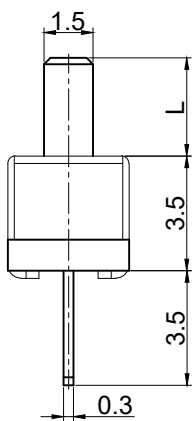


Switch drawings

Number Description

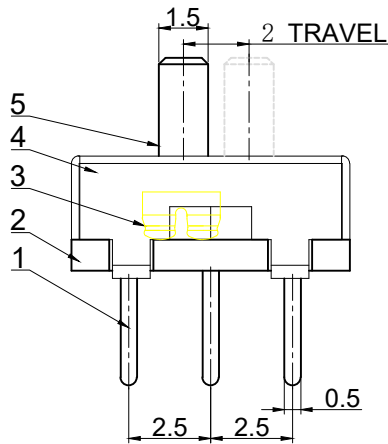


CIRCUIT DIAGRAM



P.C.B. LAYOUT

Note: Unmarked tolerances for linear dimensions shall be in accordance with GB/T1804 level m.

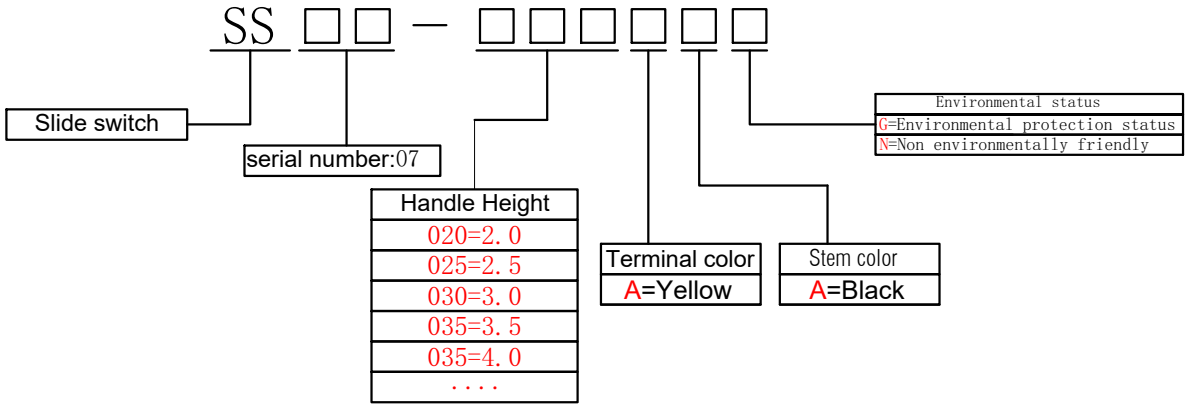

| SPECIFICATIONS         |                     |
|------------------------|---------------------|
| Funtion:               | ON-OFF              |
| Contact Arrangement:   | 1P3T, Normally Open |
| Termination:           | THD version         |
| Environmental          |                     |
| Operating Temperature: | -25~+70℃            |
| Relative Humidity:     | (40℃) ≤95%          |
| Electrical             |                     |
| Contact Rating:        | 0.3A 50V DC         |
| Dielectric Strength:   | 250VAC /1min        |
| Contact Resistance:    | 100mΩ Max.          |
| Insulation Resistance: | 100MΩ Min.          |
| Travel:                | 2±0.2mm             |
| Sealing:               | /                   |
| Mechanical             |                     |
| Actuation Force:       | 250±100gf           |
| Life Expectancy:       | 5000                |

| Materials   |                                    |
|-------------|------------------------------------|
| 5.Cover:    | Stainless Steel                    |
| 4.Stem:     | Black POM                          |
| 3.Contact:  | Phosphor copper plated with silver |
| 2.Holder:   | Diallyl Phthalate                  |
| 1.Terminal: | brass plated with silver           |