







WENZHOU KHAN ELECTRONIC




Switch drawings

Dimensional tolerance is $\pm 0.2\text{mm}$

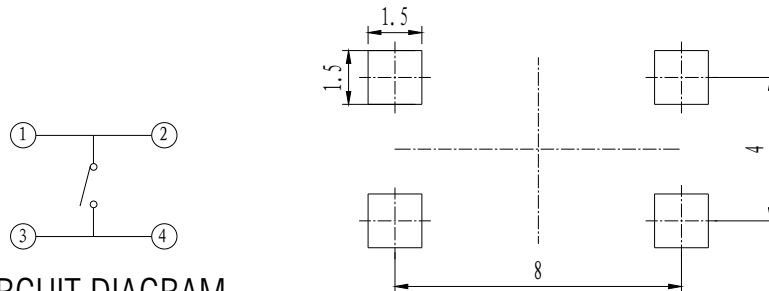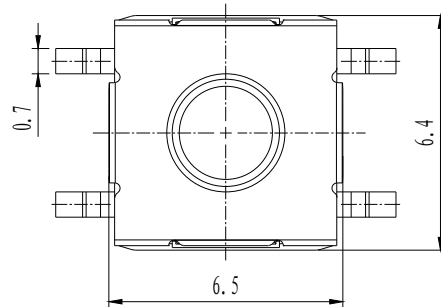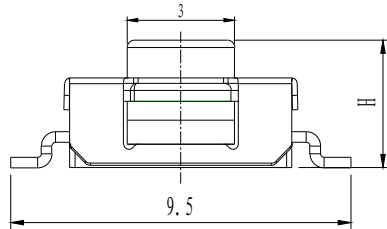


CIRCUIT DIAGRAM



P.C.B. LAYOUT

H	3.1	3.5	4.5	5
---	-----	-----	-----	---

Number Description

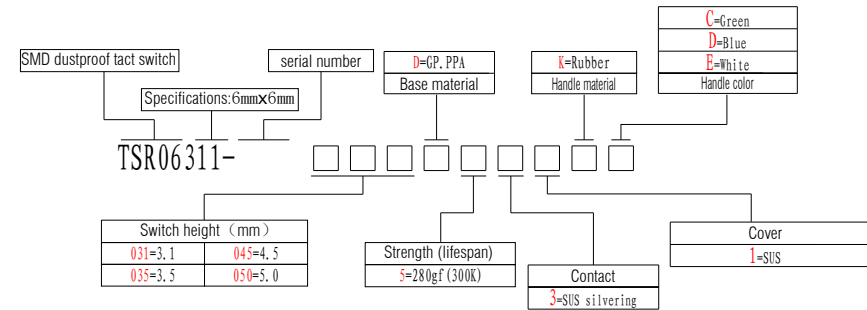

SPECIFICATIONS

Funtion:	Momentary action
Contact Arrangement:	SPST, Normally Open
Termination:	SMD dustproof

Environmental

Operating Temperature:	-25~+70°C
Relative Humidity:	(40°C) ≤95%

Electrical

Contact Rating:	50mA 12V DC
Dielectric Strength:	250VAC /1min
Contact Resistance:	100mΩ Max.
Insulation Resistance:	100MΩ Min.
Travel:	0.25 ± 0.1mm
Sealing:	IP67

Mechanical

Actuation Force:	Optional
Life Expectancy:	Optional

Materials

5.Cover:	Stainless steel
4.Stem:	Rubber:Blue\White\Green
3.Spring:	Stainless steel covered with silver
2.Holder:	Brown GP.PPA
1.Terminal:	Copper with Sliver Cladding

