
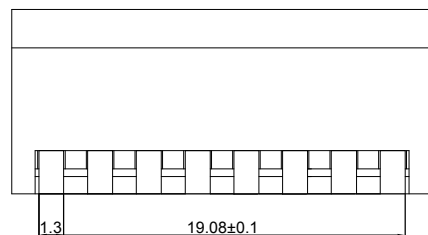




Switch drawings

Dimensional tolerance is $\pm 0.2\text{mm}$


Number Description

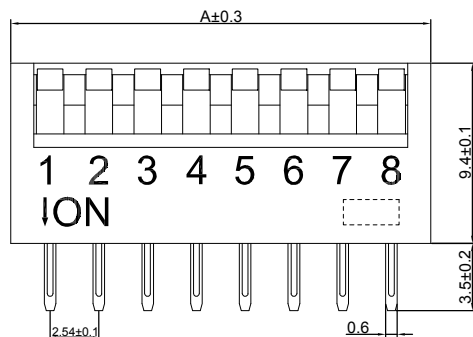

Serial number	Size
1	3.54
2	6.64
3	9.18
4	11.72
5	14.20
6	16.80
7	19.34
8	21.88
9	24.42
10	26.96
12	32.04



P.C.B. LAYOUT



CIRCUIT DIAGRAM

KP

Form code

Terminal shape
L=Long handle
R=Short handle
E=High handle

Switch digit number			
Serial number	Places	Serial number	Places
01	1	07	7
02	2	08	8
03	3	09	9
04	4	10	10
05	5	11	11
06	6	12	12

Shell color
N=Black
R=Red
B=Blue

Electroplating method
GT=Semi-tin gold
GA=Gold
TA=Tin

Additional information
T=Sticking film
The number of braided tapes
Blank=No Sticking film

SPECIFICATIONS

Funtion:	ON-OFF
Termination:	THD version

Environmental

Operating Temperature:	-20~+70℃
Relative Humidity:	(40℃) ≤95%

Electrical

Contact Rating:	25mA 12V DC
	100mA 12V DC
Dielectric Strength:	500VAC /1min
Contact Resistance:	100mΩMax.
Insulation Resistance:	100MΩMin.

Mechanical

Press Force:	1000gf Max
Life Expectancy:	2,000 times

Materials

5. Cover:	PBT
4. Stem:	PBT
3. Pouring sealant:	Epoxy resin
2. Holder:	PBT
1. Terminal:	Phosphor bronze gold plating